


MCS (Austria) (GD3)

General Description: Fully Coated White Lined Chipboard with a grey back

Board Construction

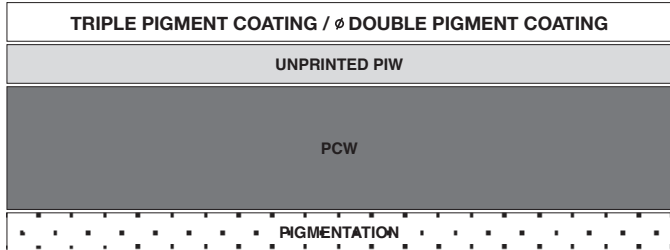

Board Specification

Microns μm	Gsm	Stiffness / Taber 15° bend mNm		Recycled %
		MD (-15%)	CD (-15%)	
Tolerance (+/- 5%)	(+/- 2%)			
280	230	3.6	1.7	89%
300	250	5.8	2.6	89%
345	280	8.1	3.7	90%
370	300	10.7	4.9	91%
400	320	13.6	5.5	91%
450	350	17.8	7.2	92%
Tolerance (+/- 3%)				
500	380	21.7	8.6	92%
530	400	25.0/25.5	10.0/9.8	93%
560	420	27.6/30.4	11.1	93%
ø 610	450	34.4/35.8	13.7/13.2	94%
ø 650	480	45.0	16.5	94%
ø 675	500	49.0	17.5	94%
ø 745	550	62.0	22.0	94%
ø 810	600	75.0	27.0	94%
ø 880	650	82.0	32.0	94%
ø 945	700	104.0	39.0	94%

What are the uses for this board?

Cartons:

Non-Direct Food Contact, Direct Contact with Dry Foods, Household Goods, Garden Goods, Toys, DIY, Industrial, Heavy Duty Outers, Backing Boards and Stiffeners

Mill Certificates

- FSC
- ISO 9001
- ISO 14001
- ISEGA on request
- HACCP
- EMAS
- HALAL