


MCM (Austria) (GD2)

General Description: Fully Coated White Lined Chipboard with a grey back

Board Construction

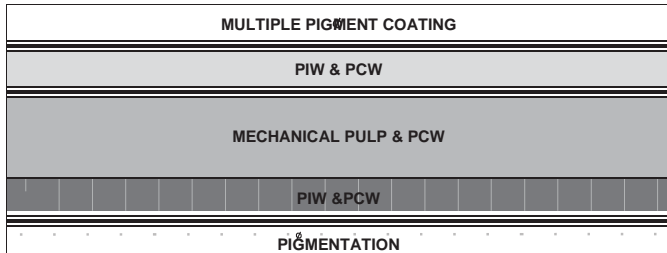

Board Specification

Microns μm	Gsm	Stiffness / Taber 15° bend mNm		Recycled %
		MD (-15%)	CD (-15%)	
Tolerance (+/- 5%)	(+/- 2%)			
290	230	5.4	2.5	79%
340	250	7.5	3.4	81%
380	280	10.7	4.9	83%
410	300	12.6	5.8	84%
435	320	16.2	6.4	85%
490	350	20.6	7.8	86%
Tolerance (+/- 3%)				
540	380	25.2	10.1	87%
ø565	400	28.0	11.3	88%
590	420	32.4	12.9	88%
ø625	450	37.5	15.0	89%
685	500	47.0	18.8	90%
ø725	525	53.1	21.2	91%
755	550	60.3	24.1	92%

Mill Certificates

- FSC
- ISO 9001
- ISO 14001
- PEFC
- HACCP
- EMAS
- HALAL
- ISEGA on request

What are the uses for this board?

Cartons:

Non-Direct Food Contact, Direct Contact with Dry Foods, Household Goods, Toys, DIY, Electronics, Horticultural, Backing Boards and Stiffeners

www.varsitypackaging.co.uk