


MM Topliner (GD2)

General Description: Superior Fully Coated White Lined Chipboard for Litho Lamination

Board Construction

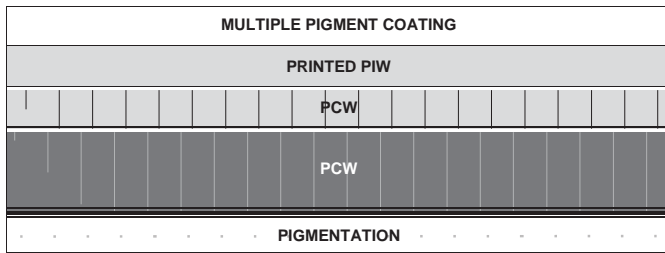

Board Specification

| Microns μm Tolerance (+/- 5%) | Gsm (+/- 2%) | Burst (kPa) (-10%) | Smoothness μm | Gloss 75° (%) | Brightness (%) |
|---|-----------------|-----------------------|--------------------------|----------------------|----------------|
| 180 | 160 | 330 | < 1.5 | > 50 | 83 |
| 200 | 180 | 380 | < 1.5 | > 50 | 83 |
| 220 | 195 | 395 | < 1.5 | > 50 | 83 |
| 240 | 210 | 410 | < 1.5 | > 50 | 83 |
| 260 | 230 | 430 | < 1.5 | > 50 | 83 |
| 280 | 250 | 450 | < 1.5 | > 50 | 83 |

What are the uses for this board?

Cartons:

Litho Lamination, Lamination to Greyboard, POS/Display Outers, Multi-purpose Cartons, Heavy Duty Corrugated Cartons, High Quality Corrugated Cartons, Wine Boxes

Mill Certificates

- FSC
- PEFC
- ISO 9001
- HACCP
- HALAL
- ISEGA on request
- ISO 50001:2011