


Venoplex (GD2)

General Description: Fully Coated White Lined Chipboard with a grey back

Board Construction

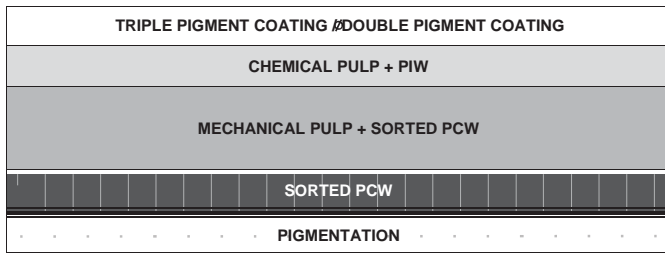

Board Specification

Microns μm	Gsm	Stiffness / Taber 15° bend mNm		Recycled %
		MD (-15%)	CD (-15%)	
Tolerance (+/- 5%)	(+/- 2%)			
435	300	15.7	7.4	> 80%
475	325	19.7	9.2	> 80%
515	350	24.7	11.2	> 80%
Tolerance (+/- 3%)				
550	375	30.0	13.7	> 80%
ø 610*	400	36.4	16.4	> 80%
ø 640*	425	43.2	19.4	> 80%
ø 690*	450	51.3	22.3	> 80%

What are the uses for this board?

Cartons:

Non-Direct Food Contact, Direct Contact with Dry Foods, Household Goods, Garden Goods, Toys, DIY, Industrial, Printed outers.

Mill Certificates

- FSC
- PEFC
- ISO 9001
- HACCP
- HALAL
- ISEGA on request
- ISO 14001 - 400gsm and above only
- EMAS - 400gsm and above only
- ISO 50001:2011 (max 550 μm)

* 400gsm and above available Hard Sized (Venofreeze), Subject to agreement. Terms and Conditions apply.